

HDPE 100

PE FITTINGS


POLYETHYLENE
Displays **GOOD**
CHEMICAL
RESISTANCE MATERIAL
STRENGTH AND RIGIDITY
WITHIN A TEMPERATURE
RANGE OF.
40° C and + 80° C.



PE 100

FLANGE

PP COATED STEEL
PN 10/16

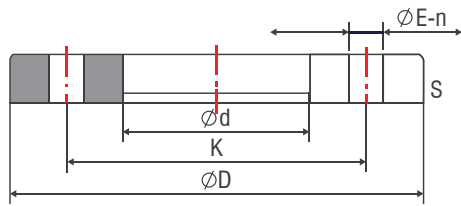

PART #	DIAMETER Ød	S1	S2
O329LFLV0150HP	50	2.94	4.55
O329LFLV0200HP	63	3.71	5.73
O329LFLV0250HP	75	4.41	6.82
O329LFLV0300HP	90	5.29	8.18
O329LFLV0400HP	110	6.47	10.00



 /hydroplast-fittings

 hydroplast

 /hydroplast

 info@hydroplast.pk

WWW.HYDROPLAST.PK

HDPE 100
PE FITTINGS