hydroplast

HDPE 100

PE FITTINGS

POLYETHYLENE
Displays GOOD
CHEMICAL
RESISTANCE MATERIAL
STRENGTH AND RIGIDITY
WITHIN A TEMPERATURE
RANGE OF.
40° C and + 80° C.

WWW.HYDROPLAST.PK

PE 100

FLANGE

ELECTROGALVANIZED STEEL
SDR 11 - PN 16

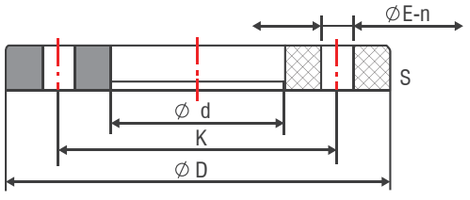

PART #	DIAMETER Ød	S
0329NFLV0150HP	50	2.94
0329NFLV0200HP	63	3.71
0329NFLV0250HP	75	4.41
0329NFLV0300HP	90	5.29
0329NFLV0400HP	110	6.47
0329NFLV0450HP	125	7.35
0329NFLV0500HP	140	8.24
0329NFLV0600HP	160	9.41
0329NFLV0700HP	180	10.59
0329NFLV0800HP	200	11.76
0329NFLV0900HP	225	13.24
0329NFLV1000HP	250	14.71
0329NFLV1100HP	280	16.47
0329NFLV1200HP	315	18.53
0329NFLV1400HP	355	20.88
0329NFLV1600HP	400	23.53
0329NFLV1800HP	450	26.47
0329NFLV2000HP	500	29.41
0329NFLV2200HP	560	32.94

Note: Physical dimensions and tolerances meet the requirements of ASTM F1970,ASTM D2467, EN 12201, ISO 4427 & DIN 8074, Which ever applicable. For installation instructions & chemical ressistance information, refer engineering section. Dimensions are subject to change without notice. All dimension are in millimeters.

PART #	DIAMETER Ød	L
0329NFLV2400HP	630	37.06
0329NFLV2800HP	710	41.76
0329NFLV3400HP	800	47.06
0329NFLV3600HP	900	52.94
0329NFLV4000HP	1000	58.82
0329NFLV4800HP	1200	70.59

Note: Physical dimensions and tolerances meet the requirements of ASTM F1970,ASTM D2467, EN 12201, ISO 4427 & DIN 8074, Which ever applicable. For installation instructions & chemical ressistance information, refer engineering section. Dimensions are subject to change without notice. All dimension are in millimeters.

hydroplast

/hydroplast-fittings

hydroplast

/hydroplast

info@hydroplast.pk

WWW.HYDROPLAST.PK

HDPE 100
PE FITTINGS