


HDPE 100

PE FITTINGS

POLYETHYLENE
Displays **GOOD**
CHEMICAL
RESISTANCE MATERIAL
STRENGTH AND RIGIDITY
WITHIN A TEMPERATURE
RANGE OF.
40° C and + 80° C.

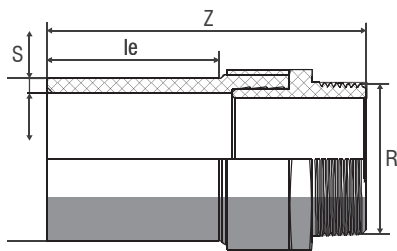

PE 100
TRANSITION ADAPTOR
**SDR 11 PE BRASS MS-58 MALE THREAD
WATER 16 BAR INJECTED - LONG SPIGOT**


PART #	DIAMETER Ød	Z	Le	S	WEIGHT(KG)
0329NE900	20	76	41	3.0	0.069
0329NE900	25	79	41	3.0	0.099
0329NE900	32	86	44	3.0	0.150
0329NE900	40	101	49	3.7	0.270
0329NE900	50	112	55	4.6	0.400
0329NE900	63	125	63	5.8	0.540



 /hydroplast-fittings

 hydroplast

 /hydroplast

 info@hydroplast.pk

WWW.HYDROPLAST.PK

HDPE 100
PE FITTINGS